

## 1. Before Installing

Ensure that you have the following:

- ✓ Pre-Programmed AudioCodes Fax ATA by IPitimi  
**Note:** use only **HTTPS** labeled version
- ✓ Included 12V power adapter (use only one supplied for your country)
- ✓ Local network (LAN) with DHCP and Internet connection
- ✓ Fax Machine or fax-capable multi function printer (MFP)



### IPITIMI FAX SOLUTION

The IPitimi Fax ATA can only be connected to our online servers using your internet connection. Before proceeding, please ensure that your Fax ATA can connect to the Internet from the location you wish to install it.

### FAX NUMBER

Your device has been pre-programmed with a Fax number, if you are porting in your fax number you will have a temporary number until it is replaced with your permanent number. Number ports can take up to 3 weeks. You may choose to forward your old number until porting is complete.




### CHECK FAX MACHINE SETTINGS

Turn off your Fax Machine's success notifications. IPITIMI's fax server will automatically send delivery notifications to your Fax Machine or directly to you via email.

If you are going to be receiving faxes at your Fax Machine, set your fax machine to auto-answer by default. Some Fax Machines do not retain this setting after being turned on / restarted.

## 2. Connecting

1. Connect the Ethernet Connector labeled "**WAN**" to your network.

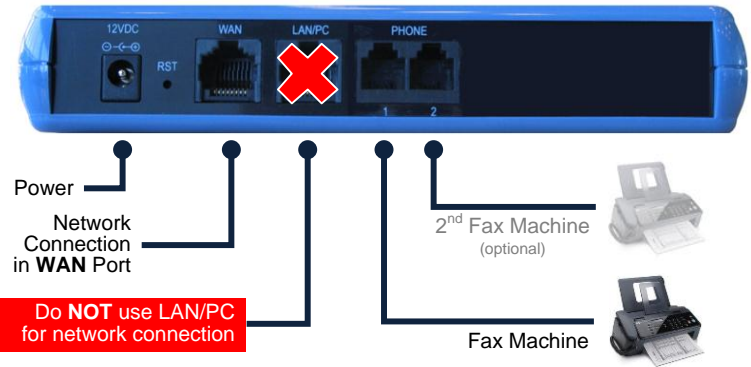


2. Connect the Telephone Port labeled **PHONE 1** to the Fax Machine. **IPitimi** does not currently support the **PHONE 2** port and it is not enabled for use.
3. Connect the Power. There is no ON/OFF (I/O) switch so the Fax ATA turns on as soon as you connect the power. The **POWER** LED is lit (green) and when initialization completes (~1 minute), the **STATUS** LED changes from red to solid green. The unit might automatically reboot within the first few minutes after downloading updated settings from IPitimi servers. This causes all 3 lights to flash simultaneously. **Wait for all 3 lights to again turn solid green.**

**Getting Help:** Go to [www.ipitimi.com/support](http://www.ipitimi.com/support) for additional help.



### INITIALIZATION

Wait for all 3 status lights to turn solid green. Usually within a minute, however could be more than 5 minutes if an automatic upgrade is needed and can also vary depending on your Internet speed.

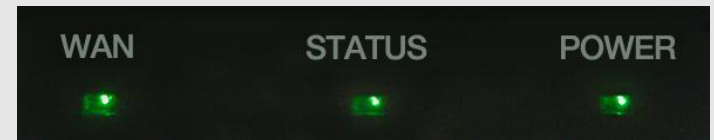

### 3. Reconfiguring Fax ATA or Changing Fax Number



If you are changing your fax number because you ported number has completed, you must re-set the device before the changes take effect. Follow these instructions to reset the device if you have been instructed to do so by IPitimi.

To reconfigure your Fax ATA, follow the steps below.

1. Unplug the power from the Fax ATA.
2. While the device is unplugged, insert the end of a paper clip into the reset hole, and while holding it in, plug the power back into the device.
3. Continue holding the paperclip in place for about 20 seconds while the device powers on, until after the lights flash before removing the paper clip.
4. **IMPORTANT:** Wait 5 to 15 minutes for the device to reconfigure before unplugging or disturbing the device.
5. When all 3 lights are solid green, you may now use the device.

### 4. Send a Fax

You can now send a fax from your Fax Machine or multi-function printer (MFP).

**Getting Help:** Go to [www.ipitimi.com/support](http://www.ipitimi.com/support) for additional help.



[www.audiocodes.com](http://www.audiocodes.com)

US Patent 8,339,646



## IPitimi Fax ATA HTTPS Fax Adapter

### Quick Installation Guide

LTRT-042-HTTPSFAX

